# ∧UTOM∧TE... 5V Li-ion EQ 10.0

Rechargeable. Battery-powered. Efficient installation. This wire-free motor's built-in rechargeable lithium-ion battery is perfect for medium to large shade applications.



#### **BI-DIRECTIONAL COMMUNICATION**

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.



## PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade.





Three shade speed settings to suit your needs – faster for larger shades, slower for smaller. Features quiet operation when set to the lowest speed setting.


## FAVORITE POSITIONING

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



## EXTRA QUIET

Variable speed and soft-stop function makes this the quietest Automate motor yet.

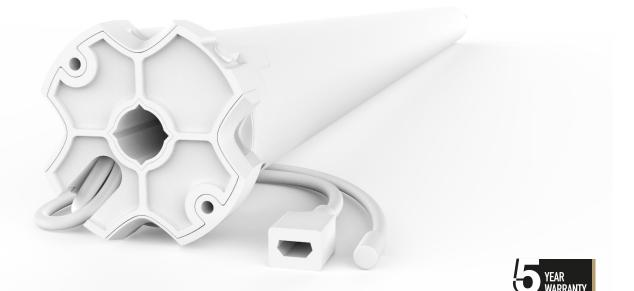




ARC<sup>™</sup> (Automate Radio Communication) is Rollease Acmeda's proprietary technology utilizing 433MHz radio communication with bi-directional feedback that brings Automate motorized shading systems together. A Division of Rollease Acmeda

# **Product Specifications**

Part #: MT01-1345-069002 5V LI-ION MOTOR [10N Ø45/5V/9rpm]

| Voltage         | 5V-DC                        | Limit Switch Type  | Electronic                  |
|-----------------|------------------------------|--------------------|-----------------------------|
| Torque          | 10Nm                         | Current            | 2.2A                        |
| Max Run Time    | 12 Min                       | Battery Size/Type  | 5200mAH                     |
| Speed           | 9 RPM (Adjustable to 7 or 5) | Temp Working Range | 32°F to 140°F (0°C to 60°C) |
| Radio Frequency | 433.92 MHz                   | Insulation Class   | Ш                           |
| RF Modulation   | FSK                          | Sound Level        | ~42DB                       |
| IP Rating       | IP44                         |                    |                             |

## Dimensions

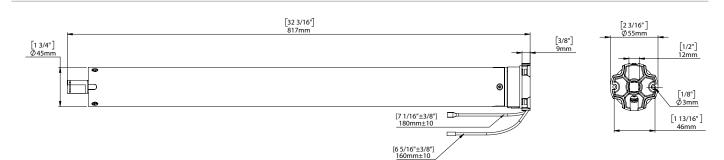

## Compatible parts

| Tubes        | Crown & Drives                 | Adaptors                  |
|--------------|--------------------------------|---------------------------|
|              |                                |                           |
|              | -                              |                           |
| 2.0"         | MTCRDR-45-2SW                  | MTDRA-LT50                |
| 2.0°<br>2.5° | MTCRDR-45-2SW<br>MTCRDR-45-2.5 | MTDRA-LT50     MTAD-45-SL |
|              |                                |                           |
| 2.5"         | MTCRDR-45-2.5                  |                           |

# **Compatible Systems**

- Skyline Shades
- S60 Shades

# COMPATIBLE PRODUCTS (refer to catalog for full item listings)



MT01-1345-069002\_Li-ion Q10.0\_v1.0

A Division of Rollease Acmeda