


Child Safe Magnetic Wand Motor

Retrofit

Upgrade manual shade systems by simply swapping the clutch for a motor, eliminating the need to re-make the shade.

Dimensions



Wand Control


A slimline wand control is used to operate the motor with basic up, down and stop functionality.

Child Safe

A entry level motor with basic functionality to support our child safe suite of products.


Removable Wand

A entry level motor with a innovative removable magnetic wand for local control to support our child safe suite of products.

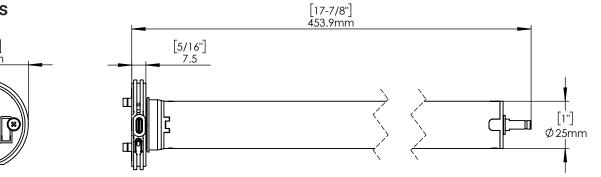

Magnetic Wand Control

Magnetic Wand Control with 24" or 36" (White Only)



Product Specifications

Voltage	5V-DC
Torque	1.1Nm
Max Run Time	12 min.
Speed	28 RPM (Adjustable to 20 or 24)
IP Rating	IP20
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	ш

Limit Switch Type	Electronic
Current	0.80 A
Battery Size/Type	2600mAH
Sound Level	56dBA, testing under ISO3745
Power	9.6 W
Motor - Part #	MT01-1325-069024-CT
Wand - Part #	MT03-0602-069003
	MT03-0602-069002

Accessories

MT03-0206-069002 -SKYLINE SERIES MT03-0207-069015 - LOUVOLITE SERIES MT03-0205-069001 - R8 SERIES MT03-0203-069001 - S45 SERIES MT03-0301-069026 USB Type C Cable 157" / 4000MM

MT03-0301-069008 5V USB WALL CHARGER PLUG 2A

