


CONNECTOR ASSEMBLY


1 Disassemble the connector




2 Connect the male connector with the motor cable

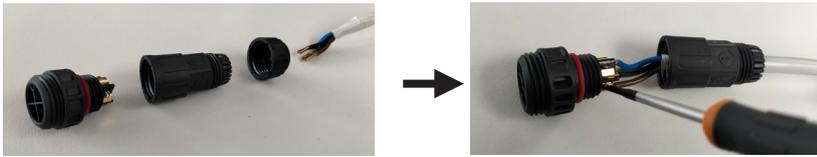


Male Connector

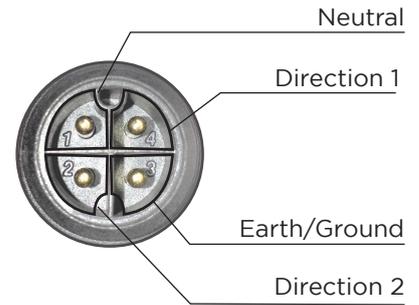

3 Connect the female connector with the other cable

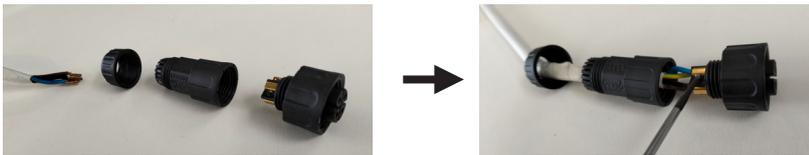


Female Connector

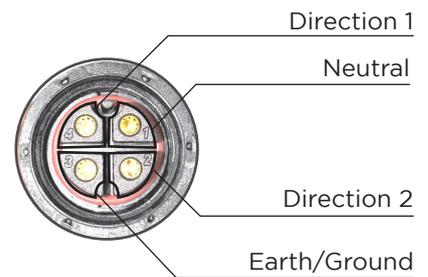

! NOTE

Wires of the same color should be connected to the same number.

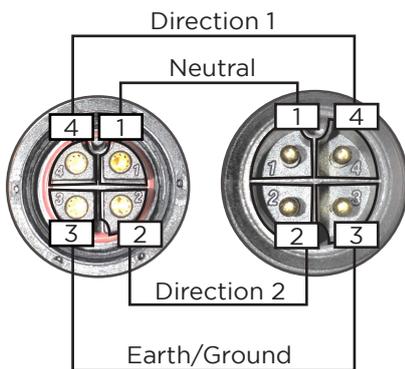

Region	Neutral	Direction 1	Direction 2	Earth/Ground
Australia	Blue	Black	Brown	Green/Yellow
USA	White	Red	Black	Green

Join male and female connectors after blind installation.



Female Connector

Male Connector (Motor Cable)

! NOTE

Tighten the plastic connectors.